

# Datasheet for JibFlex: JF 250-5


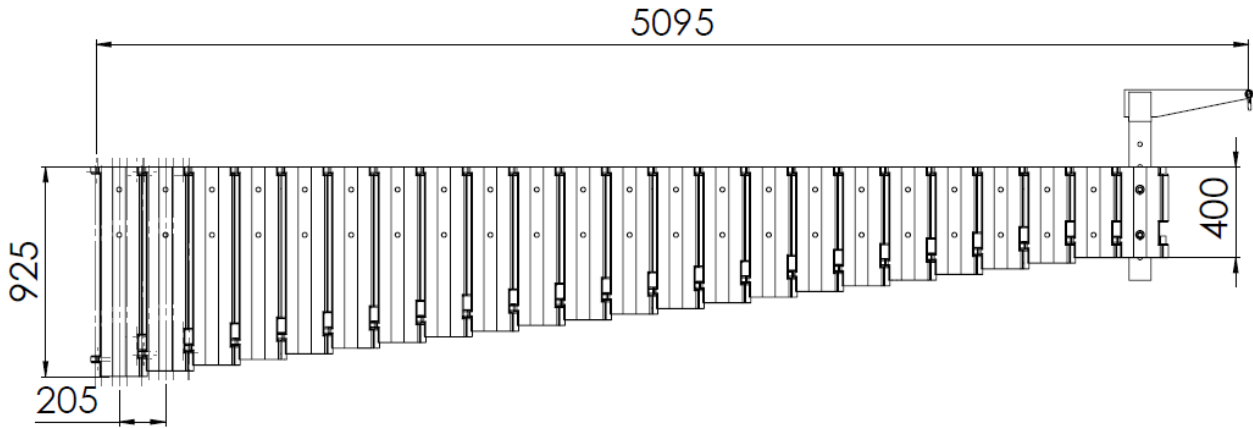


Figure 1: Basic dimensions of JF 250-5.


The lifting eye, called the stork, can be mounted in any module allowing optimisation of every lift. The WLL and radius can be seen in the tables below:

Module No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Lifting Radius [m]	0.585	0.790	0.995	1.200	1.405	1.610	1.815	2.020	2.225	2.430	2.635	2.840	3.045	3.250
WLL [kg]	500	500	500	500	500	500	500	500	500	500	500	500	500	475
Profile Height [m]	0.925	0.900	0.875	0.850	0.825	0.800	0.775	0.750	0.725	0.700	0.675	0.650	0.625	0.600
Profile Mass [kg]	16.1	15.7	15.3	14.9	14.5	14.0	13.6	13.2	12.8	12.3	11.9	11.5	11.1	10.7
Deflection from WLL [m]	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.04

Module No.	15	16	17	18	19	20	21	22	23
Lifting Radius [m]	3.455	3.660	3.865	4.070	4.275	4.480	4.685	4.890	5.095
WLL [kg]	440	405	375	350	325	305	285	265	250
Profile Height [m]	0.575	0.550	0.525	0.500	0.475	0.450	0.425	0.400	0.400
Profile Mass [kg]	10.2	9.8	9.4	9.0	8.6	8.1	7.7	7.3	7.3
Deflection from WLL [m]	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05

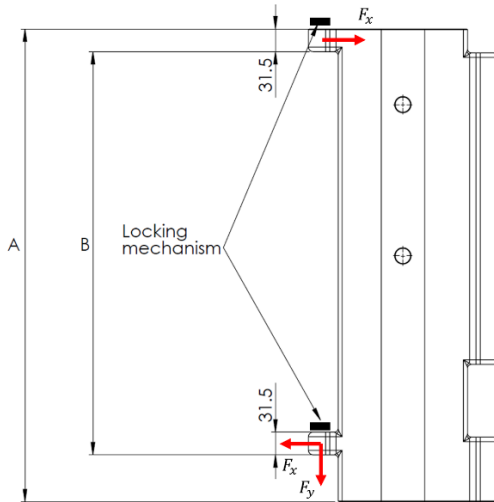

**Figure 2:** Following structural requirements applies to the supporting structure. The reactions are omnidirectional and without safety factor.

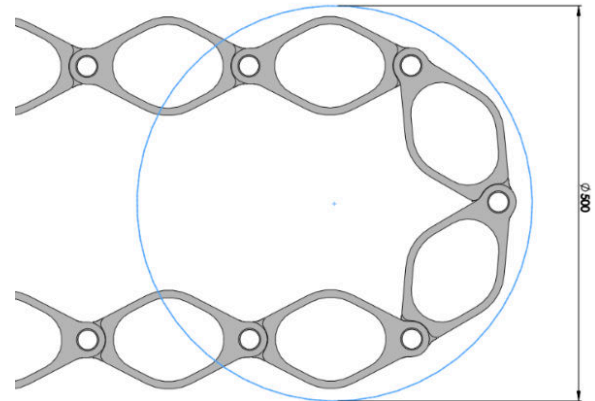

**Figure 3:** The JibFlex has a bending radius of 250 mm.

Specifications		
<b>Weight of JibFlex</b>		
• JibFlex modules	kg	264
• Stork	kg	12
• Total	kg	276
<b>WLL at last module</b>	kg	250
<b>Max radius</b>	m	5
<b>Maximum deflection cause by WLL</b>	m	0.05
<b>Safety factor including DAF</b>	-	1.95
<b>Maximum hoist speed</b>	m/s	Unlimited
<b>Installation requirements</b>		
• A	m	0.925
• B	m	0.833
• Fx	N	27500
• Fy	N	6000
<b>Bending Radius</b>	m	0.25