

## Datasheet for JibFlex: JF 450-3

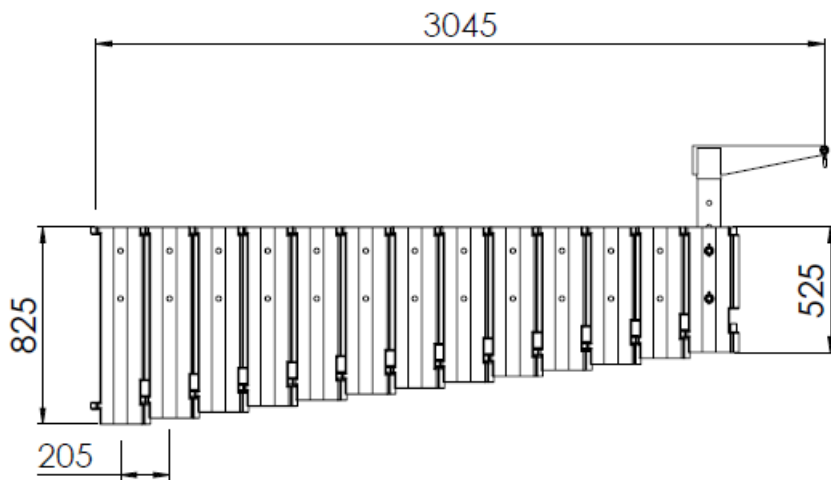


Figure 1: Basic dimensions of JF 450-3.

The lifting eye, called the stork, can be mounted in any module allowing optimisation of every lift. The WLL and radius can be seen in the table below:

Module No.	1	2	3	4	5	6	7	8	9	10	11	12	13
Lifting Radius [m]	0.585	0.790	0.995	1.200	1.405	1.610	1.815	2.020	2.225	2.430	2.635	2.840	3.045
WLL [kg]	500	500	500	500	500	500	500	500	500	500	500	500	455
Profile Height [m]	0.825	0.800	0.775	0.750	0.725	0.700	0.675	0.650	0.625	0.600	0.575	0.550	0.525
Profile Mass [kg]	14.5	14.0	13.6	13.2	12.8	12.3	11.9	11.5	11.1	10.7	10.2	9.8	9.4
Deflection from WLL [m]	< 0.02	< 0.02	< 0.02	< 0.02	< 0.02	< 0,02	< 0,02	< 0,02	< 0,02	< 0,02	< 0,02	< 0,02	0.02

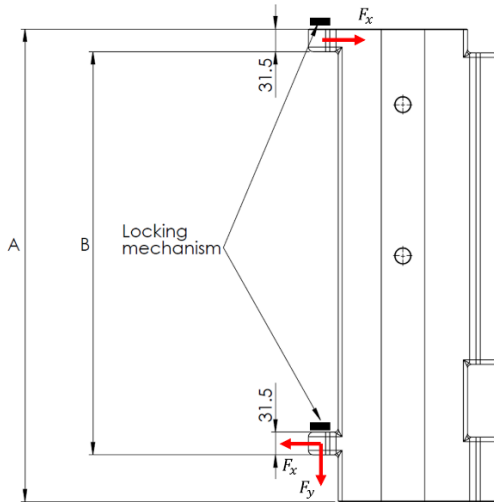


Figure 2: Following structural requirements applies to the supporting structure. The reactions are omnidirectional and without safety factor.

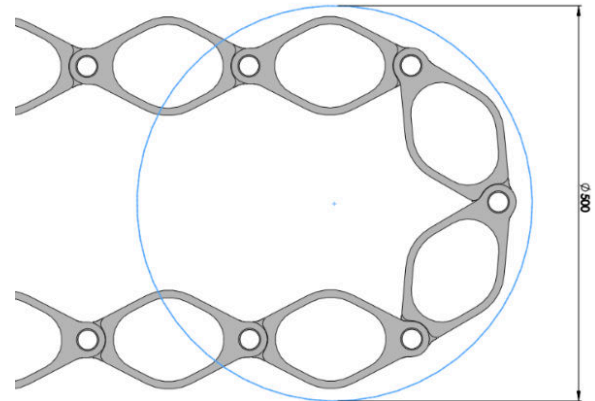


Figure 3: The JibFlex has a bending radius of 250 mm.

Specifications		
<b>Weight of JibFlex</b>		
• JibFlex modules	kg	154
• Stork	kg	12
• Total	kg	166
<b>WLL at last module</b>	kg	450
<b>Max radius</b>	m	3
<b>Maximum deflection cause by WLL</b>	m	0.02
<b>Safety factor including DAF</b>	-	1.95
<b>Maximum hoist speed</b>	m/s	Unlimited
<b>Installation requirements</b>		
• A	m	0.825
• B	m	0.733
• Fx	N	28000
• Fy	N	7500
<b>Bending Radius</b>	m	0.25