

## Datasheet for JibFlex: JF 150-5


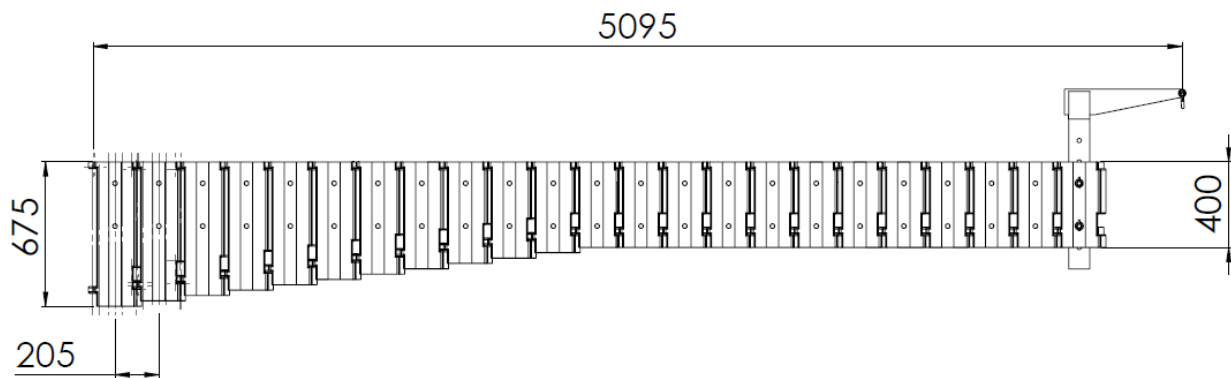


Figure 1: Basic dimensions of JF 150-5.


The lifting eye, called the stork, can be mounted in any module allowing optimisation of every lift. The WLL and radius can be seen in the tables below:

Module No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Lifting Radius [m]	0.585	0.790	0.995	1.200	1.405	1.610	1.815	2.020	2.225	2.430	2.635	2.840	3.045	3.250
WLL [kg]	500	500	500	500	500	500	500	500	500	475	430	390	355	325
Profile Height [m]	0.675	0.650	0.625	0.600	0.575	0.550	0.525	0.500	0.475	0.450	0.425	0.400	0.400	0.400
Profile Mass [kg]	11.9	11.5	11.1	10.7	10.2	9.8	9.4	9.0	8.6	8.1	7.7	7.3	7.3	7.3
Deflection from WLL [m]	<0.02	<0.02	<0.02	<0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.06

Module No.	15	16	17	18	19	20	21	22	23
Lifting Radius [m]	3.455	3.660	3.865	4.070	4.275	4.480	4.685	4.890	5.095
WLL [kg]	300	280	255	235	220	205	190	175	160
Profile Height [m]	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400
Profile Mass [kg]	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3
Deflection from WLL [m]	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.08

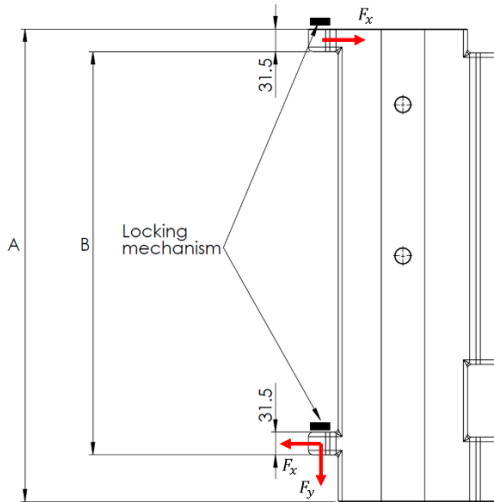

**Figure 2:** Following structural requirements applies to the supporting structure. The reactions are omnidirectional and without safety factor.

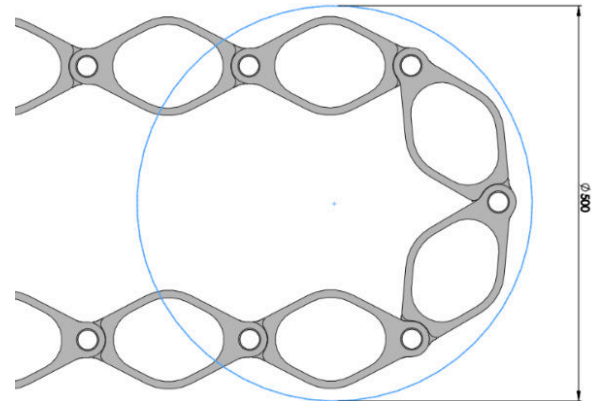

**Figure 3:** The JibFlex has a bending radius of 250 mm.

Specifications		
<b>Weight of JibFlex</b>		
• JibFlex modules	kg	194
• Stork	kg	12
• Total	kg	206
<b>WLL at last module</b>	kg	160
<b>Max radius</b>	m	5
<b>Maximum deflection cause by WLL</b>	m	0.08
<b>Safety factor including DAF</b>	-	1.95
<b>Maximum hoist speed</b>	m/s	Unlimited
<b>Installation requirements</b>		
• A	m	0.675
• B	m	0.583
• Fx	N	26000
• Fy	N	4000
<b>Bending Radius</b>	m	0.25