

## Datasheet for JibFlex: JF 50-4

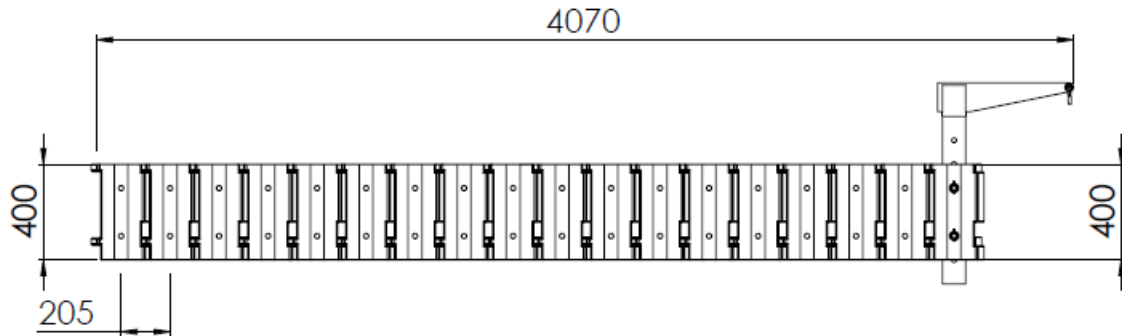


Figure 1: Basic dimensions of JF 50-4.

The lifting eye, called the stork, can be mounted in any module allowing optimisation of every lift. The WLL and radius can be seen in the tables below:

Module No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Lifting Radius [m]	0.585	0.790	0.995	1.200	1.405	1.610	1.815	2.020	2.225	2.430	2.635	2.840	3.045	3.250
WLL [kg]	500	500	500	500	455	380	330	285	250	220	200	175	160	140
Profile Height [m]	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400
Profile Mass [kg]	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3
Deflection from WLL [m]	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	0.02	0.02	0.02	0.02	0.02

Module No.	15	16	17	18
Lifting Radius [m]	3.455	3.660	3.865	4.070
WLL [kg]	130	115	105	90
Profile Height [m]	0.400	0.400	0.400	0.400
Profile Mass [kg]	7.3	7.3	7.3	7.3
Deflection from WLL [m]	0.02	0.02	0.02	0.02

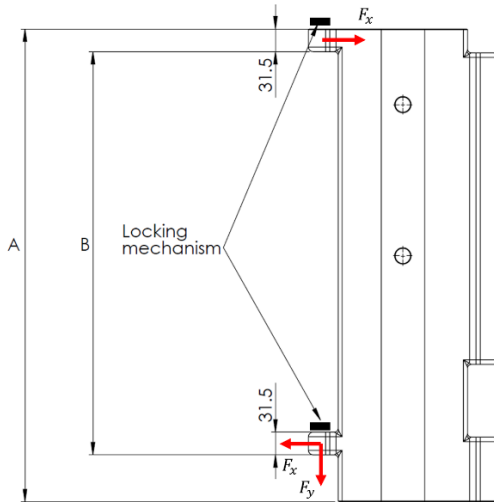


Figure 2: Following structural requirements applies to the supporting structure. The reactions are omnidirectional and without safety factor.

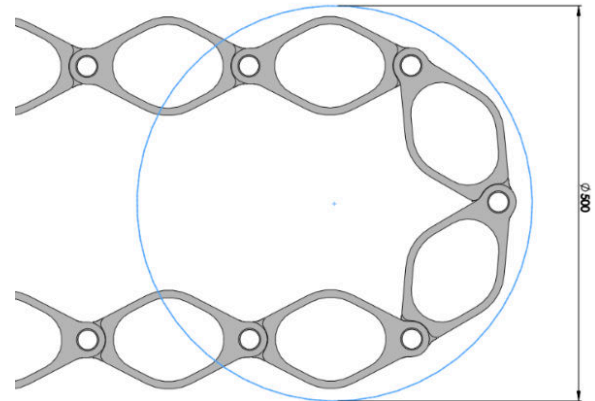


Figure 3: The JibFlex has a bending radius of 250 mm.

Specifications		
<b>Weight of JibFlex</b>		
• JibFlex modules	kg	130
• Stork	kg	12
• Total	kg	142
<b>WLL at last module</b>	kg	90
<b>Max radius</b>	m	4
<b>Maximum deflection cause by WLL</b>	m	0.02
<b>Safety factor including DAF</b>	-	1.95
<b>Maximum hoist speed</b>	m/s	Unlimited
<b>Installation requirements</b>		
• A	m	0.400
• B	m	0.308
• Fx	N	18000
• Fy	N	2100
<b>Bending Radius</b>	m	0.25